COREFIX® STRAP

FEATURES

- Heavy duty hollow wall toggle fixing
- Easy to install by drilling a 13mm hole
- Ideal for thick hollow wall materials including plasterboard, multimaterial and hollow brick & block with large cavities
- Strong toggle mechanism spreads load behind the wall material for reliable hold

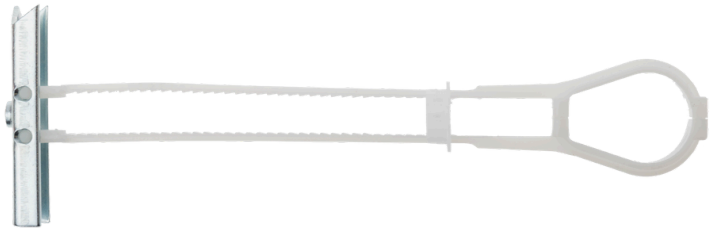

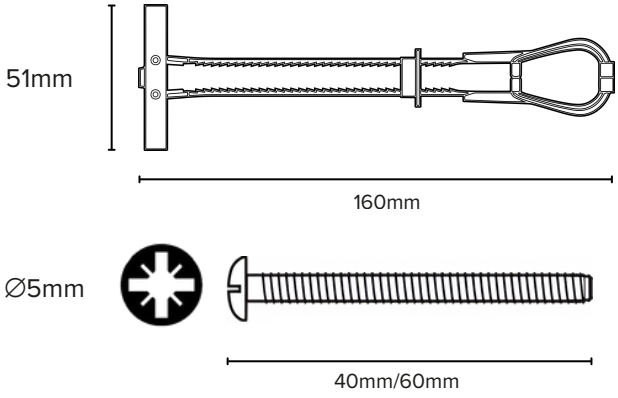

APPLICATIONS

- **Cabinets**
- **Curtains**
- **TV Brackets**
- **Bathroom fixtures**
- **Electrical boxes**
- **Shelves**

INSTRUCTIONS

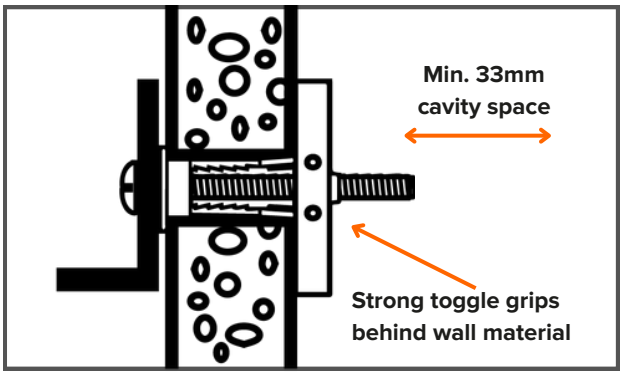

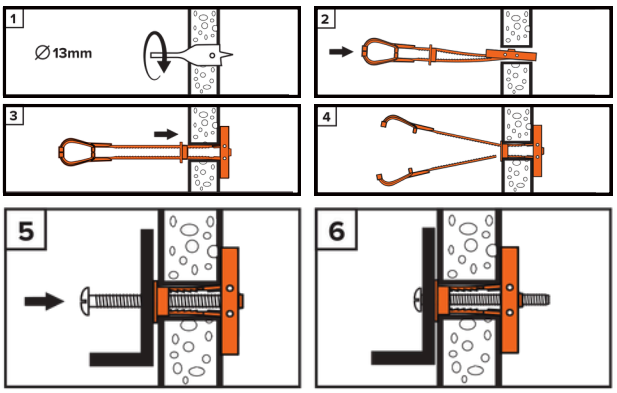

- Always check for cables and pipes before drilling and use suitable PPE.
- Independently tested on plasterboard with blockwork behind.
- Always refer to manufacturer's instructions when installing anything with Corefix and use the recommended number of fixings.

TECHNICAL DATA

	40mm bolt	60mm bolt
Drill diameter	13mm	13mm
Min. hole drill depth	n/a	n/a
Screw diameter	5mm	5mm
Screw material	Steel	Steel
Fixing length	160mm	160mm
Fixing material	Zinc coated metal & plastic	Zinc coated metal & plastic
Max. fixture thickness	10mm	30mm
Safe Working Load - Hollow Block (Shear, single fixing)	60kg	60kg
Safe Working Load - Plasterboard (Shear, single fixing)	30kg	30kg
Max. wall material thickness	30mm	50mm

Notes: Factor of safety of 2. Data is for static loadings.